SEQUEL

312-053, Forest

TECHNICAL INFORMATION

CATEGORY: Upholstery, Panel CONTENT: 100% Polyester **BACKING: None** FINISH: Nanotex® WIDTH: 54" WEIGHT: 13 oz./ln yd VISUAL REPEAT: None SHOWN RAILROADED: No **DIRECTIONAL: Yes** APPROX. ROLL SIZE: 60 yards

PERFORMANCE




ABRASION RESISTANCE: Passes 288,000 Double Rubs* (Wyzenbeek/Cotton Duck) BREAKING STRENGTH: Warp 267.0 / Fill 271.0 COLORFASTNESS TO CROCKING: Dry: Class 4/Wet: Class 3 COLORFASTNESS TO LIGHT: 60 hours **PILLING RESISTANCE: Class 4** SEAM SLIPPAGE: Warp 35.0 / Fill 47.0

* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

FLAMMABILITY

PASSES CAL TB 117-2013 NFPA 260/UFAC CLASS 1 **AB 2998 COMPLIANT** CAL 117 SECTION E

MAYERFABRICS

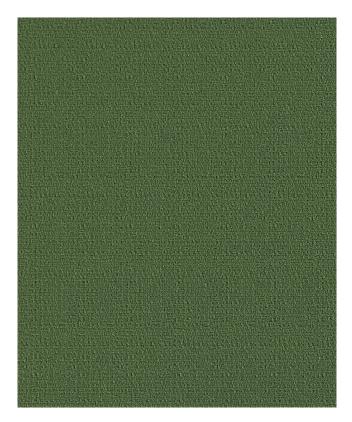

REDUCED ENVIRONMENTAL IMPACT GREENGUARD GOLD CERTIFIED PFAS FREE NO FR ADDITIVES NO ANTIMICROBIAL ADDITIVES NO ANTIBACTERIAL ADDITIVES **PROP 65 COMPLIANT** MILLED IN AMERICA **REACH COMPLIANT ROHS COMPLIANT** DOES NOT CONTAIN CONFLICT MINERALS **BERRY COMPLIANT**

MAY COMPLY WITH CAL. TECH. BUL. 133 WHEN COMBINED WITH APPROPRIATE COMPONENTS.

WARRANTY

STANDARD UPHOLSTERY | '5' FIVE YEAR WARRANTY See <u>Warranty Terms</u> for more information.

DYE TRANSFER DISCLAIMER

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. Mayer Fabrics will not assume responsibility for dye transfer caused by external contaminants. Please check compatibility when using this product in combination with painted or varnished surfaces.

ADDITIONAL INFORMATION

Custom Colors: All patterns can be custom colored. Minimum yardage applies.

Digital Swatch Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.



This 100% polyester fabric is included in the Underwriter's Laboratory Fabric Recognition Program. Additional testing of this U.L. recognized component is not required on approved panels from participating manufacturers.

CLEANING & MAINTENANCE

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.