## **MEANDER**

419-002, Dijon

### **TECHNICAL INFORMATION**

CATEGORY: Upholstery, Panel

CONTENT: 100% Recycled Polyester (52% Pre-/48% Repreve

Post-Consumer)/48% Repreve Polyester

BACKING: None FINISH: None WIDTH: 54"

WEIGHT: 9.6 oz./ln yd

VISUAL REPEAT: 14.3 in/36.32 cm H, 9.5 in/24.13 cm V

SHOWN RAILROADED: No

**DIRECTIONAL:** Yes

APPROX. ROLL SIZE: 56 yards

APPLICATION: Indoor

### **PERFORMANCE**



ABRASION RESISTANCE: Passes 75,000 Double Rubs

(Wyzenbeek/Cotton Duck)


BREAKING STRENGTH: Warp 250.0 / Fill 125.0

COLORFASTNESS TO CROCKING: Dry: Class 4 min/Wet: Class 3 min

COLORFASTNESS TO LIGHT: 60 hours PILLING RESISTANCE: Class 4 min SEAM SLIPPAGE: Warp 60.0 / Fill 60.0

### **FLAMMABILITY**

PASSES CAL TB 117-2013
NFPA 260/UFAC CLASS 1
AB 2998 COMPLIANT
ASTM E84 CLASS 1 OR A (UNADHERED)

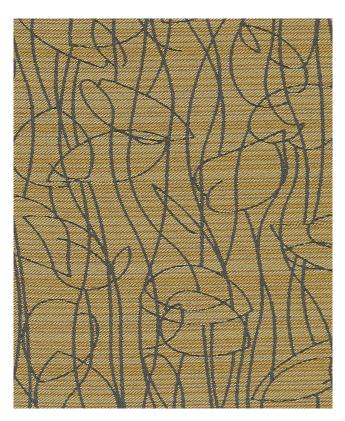

### REDUCED ENVIRONMENTAL IMPACT

**GREENGUARD GOLD CERTIFIED** 

PFAS FREE

NO FR ADDITIVES

HHI / GREENHEALTH COMPLIANT

NO ANTIMICROBIAL ADDITIVES

NO ANTIBACTERIAL ADDITIVES

PROP 65 COMPLIANT

MILLED IN AMERICA

**REACH COMPLIANT** 

**ROHS COMPLIANT** 

DOES NOT CONTAIN CONFLICT MINERALS

# SPECIFICATIONS - MEANDER (419)

## MAYERFABRICS

### **WARRANTY**

STANDARD UPHOLSTERY | '5' FIVE YEAR WARRANTY See Warranty Terms for more information.

### DYE TRANSFER DISCLAIMER

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. Mayer Fabrics will not assume responsibility for dye transfer caused by external contaminants. Please check compatibility when using this product in combination with painted or varnished surfaces.

### ADDITIONAL INFORMATION

Custom Colors: All patterns can be custom colored. Minimum yardage applies.

Digital Swatch Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.



This 100% polyester fabric is included in the Underwriter's Laboratory Fabric Recognition Program. Additional testing of this U.L. recognized component is not required on approved panels from participating manufacturers.

#### **CLEANING & MAINTENANCE**

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

BC: Bleach Cleanable - 1 parts bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.