## **AKOYA**

PC13-009, Sunset Kindred Collection

### **TECHNICAL INFORMATION**

CATEGORY: Drapery & Privacy Curtains
CONTENT: 55% Polyester/45% FR Polyester

FINISH: None WIDTH: 72"

WEIGHT: 12.24 oz./ln yd

VISUAL REPEAT: 10.0 in/25.40 cm H, 27.04 in/68.68 cm V

SHOWN RAILROADED: Yes

**DIRECTIONAL:** Yes

APPROX. ROLL SIZE: 60 yards

## **PERFORMANCE**



ABRASION RESISTANCE: n/a

BREAKING STRENGTH: Warp 100.0 / Fill 100.0


COLORFASTNESS TO CROCKING: Dry: Class 4/Wet: Class 3

COLORFASTNESS TO LIGHT: 60 hours PILLING RESISTANCE: Class n/a

SEAM SLIPPAGE: Warp 97.0 / Fill 66.0

### **FLAMMABILITY**

PASSES CAL TB 117-2013 NFPA 260/UFAC CLASS 1 NFPA 701 (TEST#1)

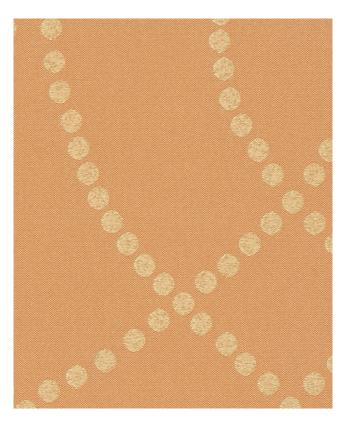

### REDUCED ENVIRONMENTAL IMPACT

**GREENGUARD GOLD CERTIFIED** 

PFAS FREE

MINDFUL MATERIALS COMPLIANT

PROP 65 COMPLIANT

MILLED IN AMERICA

REACH COMPLIANT

**ROHS COMPLIANT** 

DOES NOT CONTAIN CONFLICT MINERALS

**BERRY COMPLIANT** 

## SPECIFICATIONS - AKOYA (P13)

# MAYERFABRICS

### **WARRANTY**

PRIVACY CURTAIN | '3' THREE YEAR WARRANTY See Warranty Terms for more information.

## **ADDITIONAL INFORMATION**

Custom Colors: All patterns can be custom colored. Minimum yardage applies.

Digital Swatch Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

### **CLEANING & MAINTENANCE**

PC: Privacy Curtains Cleaning Info - Wash Cycle: Process Cubicle fabric as any ordinary colored fabric, temperature not to exceed 160F. Use a synthetic detergent. Add softener to the last rinse cycle. Extracting Cycle: Fabric requires no more than 2-4 min. extracting, depending on size of load and equipment used. Drying Cycle: Do not overload dryer. Tumble dry for 3-5 min. on synthetic cycle 110F. As with all polyester fabrics, excessive heat will detract from the permanent press characteristics of this fabric. Finishing: If fabric is folded upon completion of the drying cycle, no finishing is required. Occasional light touch-up with a hand iron (275F max), or using a flat bed press with covered head may be desired for smoother seams. Important: Use cover cloth between fabric and iron or pressing head. Avoid prolonged contact with heat. Notes: Do not use caustic soap or bleach. Do not put through a mangler.