

## SLICK

SL-007, Taupe

### TECHNICAL INFORMATION

CATEGORY: Upholstery  
CONTENT: 70% Vinyl face, 30% Polyester backing  
BACKING: 100% Polyester  
FINISH: Soil & Stain Resistant Top Coat with Ink Resistant Technology  
WIDTH: 54"  
WEIGHT: 30 oz./ln yd  
VISUAL REPEAT: None  
SHOWN RAILROADED: No  
DIRECTIONAL: No  
APPROX. ROLL SIZE: 30 yards  
APPLICATION: Indoor / Outdoor / Marine Use / Atrium

### PERFORMANCE




ABRASION RESISTANCE: Passes 1,000,000 Double Rubs\*  
(Wyzenbeek/Cotton Duck)  
BREAKING STRENGTH: Warp 99.0 / Fill 79.0  
COLORFASTNESS TO CROCKING: Dry: Class Exc./Wet: Class Exc.  
COLORFASTNESS TO LIGHT: 1500 hours  
PILLING RESISTANCE: Class n/a  
MILDEW RESISTANT

\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.  
Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

### FLAMMABILITY

PASSES NFPA 260/UFAC CLASS 1  
AB 2998 COMPLIANT  
BOSTON FIRE DEPT. CODE (BFD IX-1)  
FAA/FAR 25.853(A) & APPENDIX F PART I(A)(11)  
FMVSS 302  
IMO A.652 (16) 8.2 & 8.3  
NY/NJ PORT AUTHORITY

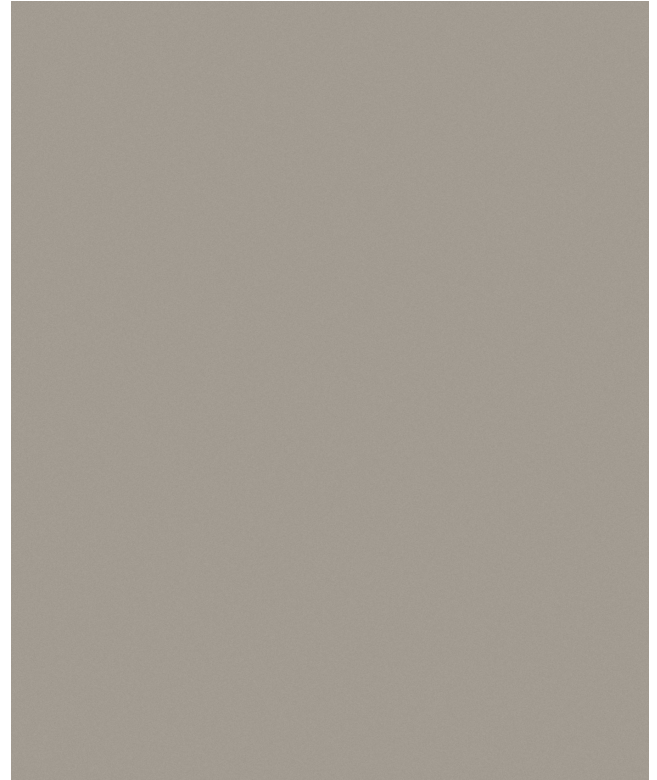

### REDUCED ENVIRONMENTAL IMPACT

PHthalate FREE  
NO FR ADDITIVES  
FORMALDEHYDE FREE  
DOES NOT CONTAIN CONFLICT MINERALS

## WARRANTY

STANDARD UPHOLSTERY | '5' FIVE YEAR WARRANTY  
See [Warranty Terms](#) for more information.

## DYE TRANSFER DISCLAIMER

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. Mayer Fabrics will not assume responsibility for dye transfer caused by external contaminants. Please check compatibility when using this product in combination with painted or varnished surfaces.

## ADDITIONAL INFORMATION

Custom Colors: All patterns can be custom colored. Minimum yardage applies.

Digital Swatch Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

## CLEANING & MAINTENANCE

CFC: Coated Fabrics Cleaning - When a spill/stain occurs wipe immediately with a clean dry cloth. Carefully remove the majority of the stain then follow the steps below.

Soap & Water - Remove ordinary dirt and smudges with a mild soap and water solution using a soft cloth or towel. Rinse with fresh water and wipe dry.

Non-abrasive Cleaners - If residue remains, use a straight application of the following cleaners: Fantastik or 409 and gently clean with a soft cloth. Rinse with fresh water and wipe dry.

Isopropyl Alcohol - More stubborn stains may be eliminated using a cotton cloth soaked in 70-91% isopropyl (rubbing) alcohol. Wipe without spreading stain to surrounding area. A second application should be applied with vigorous rubbing in a circular motion. For highly textured material, a soft brush is recommended to clean valleys and crevices. Rinse with fresh water and wipe dry.

BC: Bleach Cleanable - 1 parts bleach, 4 parts water = 20% bleach, 80% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 20% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.