



316-007 Putty



316-009 Copper



316-013 Sulfur



316-010 Taupe



316-019 Red Clay




316-003 Feldspar



316-000 Earth



316-008 Plum

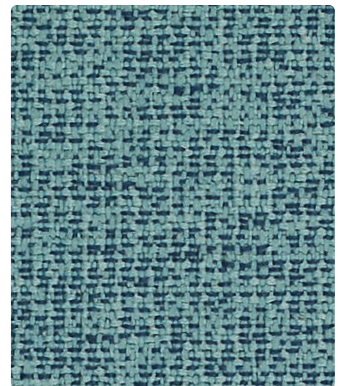

316-024 Turquoise



316-006 Smoke



316-014 Ink



316-004 Sapphire

Application
Seating

Content
85% Antimony Free Polyester,
15% Polyester

Width
54 inches

Abrasion
Passes 130,000 Double Rubs

Finish
INCASE® with Antimicrobial
Silver Ion Technology

Reduced Environmental Impact
Antimony Free
GREENGUARD Gold Certified

TECHNICAL INFORMATION

Content: 85% Antimony Free Polyester , 15% Polyester Width: 54" Weight: 13 oz./linear yard	Backing: None Finish: INCASE® with Antimicrobial Silver Ion Technology Cleanability: WS	Approx. Repeat: Non-Matching Directional: Yes Railroaded: No
---	--	--

PERFORMANCE (*Certification Marks Owned by ACT*)	Test Method	Results
Surface Abrasion: Heavy Duty A *	ASTM-D-4157 (Cotton Duck)	Passes 130,000 Double Rubs
Breaking Strength: ✂ *	ASTM-D-5034	Warp 329 lbs / Fill 239 lbs
Seam Slippage: ✂ *	ASTM-D-4034	Warp 93 lbs / Fill 83 lbs
Pilling Resistance: ✂ *	ASTM-D-3511	Class 5
Colorfastness to Crocking: ☛ *	AATCC-8	Dry: Class 4 min / Wet: Class 3 min
Colorfastness to Light: ☼ *	AATCC-16A	Class 4 at 60 Hours

Class in the colorfastness requirements is based on a numerical scale of 5 for negligible or no color transfer to 1 for very severe color change or color transfer.

FLAMMABILITY **🔥** *

California Technical Bulletin 117, Section E NFPA 260 (Equivalent to UFAC) Class 1 May comply with California Technical Bulletin 133 when combined with appropriate components.	Passes Passes
---	------------------

REDUCED ENVIRONMENTAL IMPACT

Antimony Free
GREENGUARD Gold Certified products are tested for low chemical emissions to standard UL 2818. For more information, visit [UL.com/gg](https://www.ul.com/gg).

STAIN RESISTANCE

Stain Resistance is based on a numerical scale with 5 being the highest for stain removal.

	After 5 min./After 24 hrs.		After 5 min./After 24 hrs.
Blood	Class 4-5/Class 4-5	Urine	Class 4-5/Class 4-5
Iodine	Class 4-5/Class 4-5	Suntan Lotion	Class 4-5/Class 4-5
Ketchup	Class 4-5/Class 4-5	Black Coffee	Class 4-5/Class 4-5
Milk	Class 4-5/Class 4-5	Cola	Class 4-5/Class 4-5

BACTERIAL RESISTANCE

Non leaching Silver Ion Technology microbial protection.
Excellent anti-bacterial properties.
INCASE® resists bacterial growth, test ISO 20743:2007(E), Klebsiella pneumoniae (ATCC #4352)

CLEANING INFORMATION

WS: Water/Solvent Cleaner – Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

ADDITIONAL INFORMATION

Custom Capabilities: All patterns can be custom colored. Minimum yardage applies.
Memo Samples: Please keep this card intact. Individual memo samples can be ordered on our website or by contacting customer service.
Fabric Color Matching: Mayer Fabrics always attempts to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.
Digital Swatch Card Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.
Specifications: Specifications are correct at the time of printing. Current specifications are available on our website.
For information or assistance with products or services, call us at 800.428.4415 or refer to our website, www.mayerfabrics.com.

