





888-014 Eucalyptus

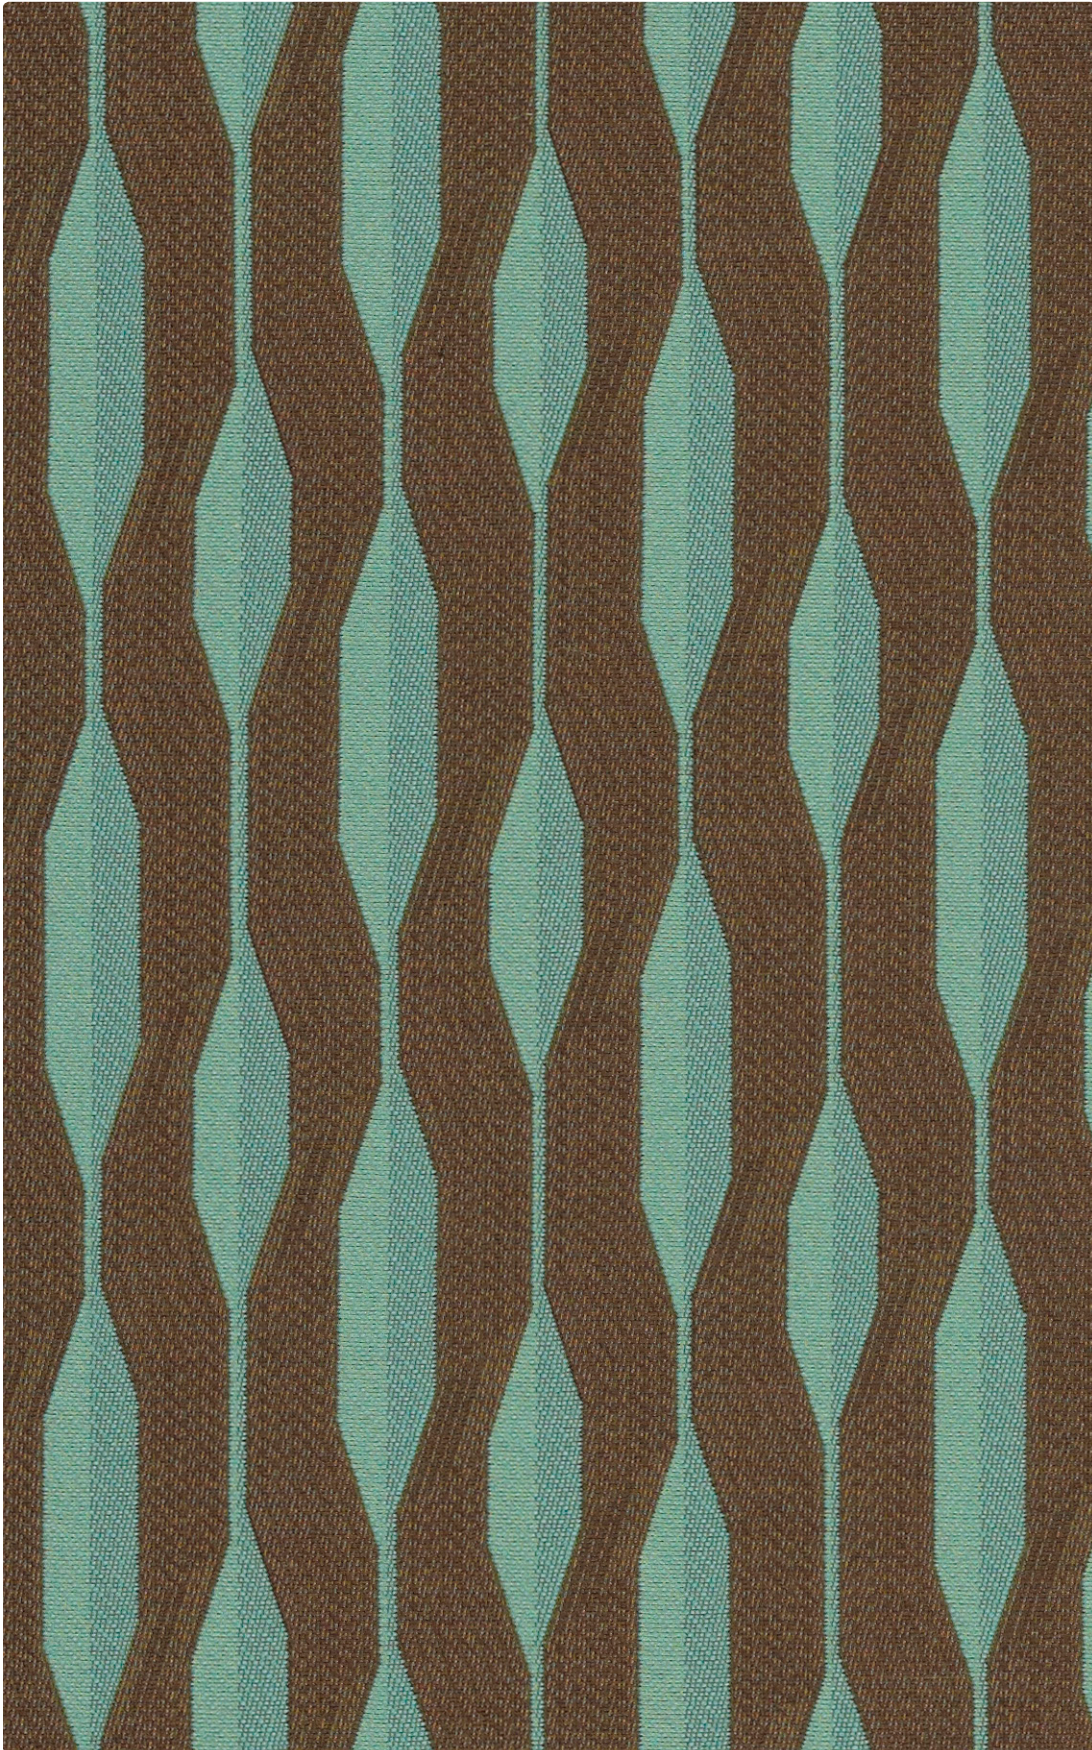

888-002 **Lemon Drop**

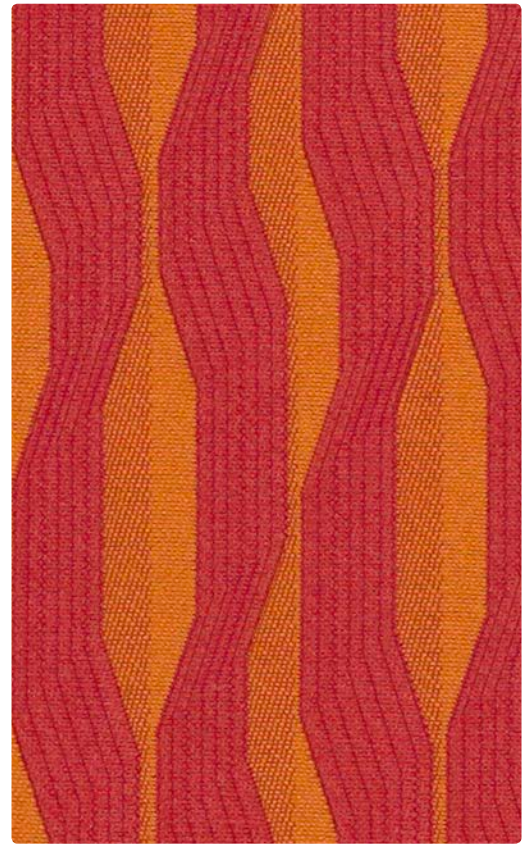

888-009 **Spice**



Application
Seating


Content
72% Cotton, 28% Nylon

Width
54 inches


Abrasion
Passes 90,000 Double Rubs

Finish
INCASE™ with Antimicrobial
Silver Ion Technology

Reduced Environmental Impact
GREENGUARD Gold Certified

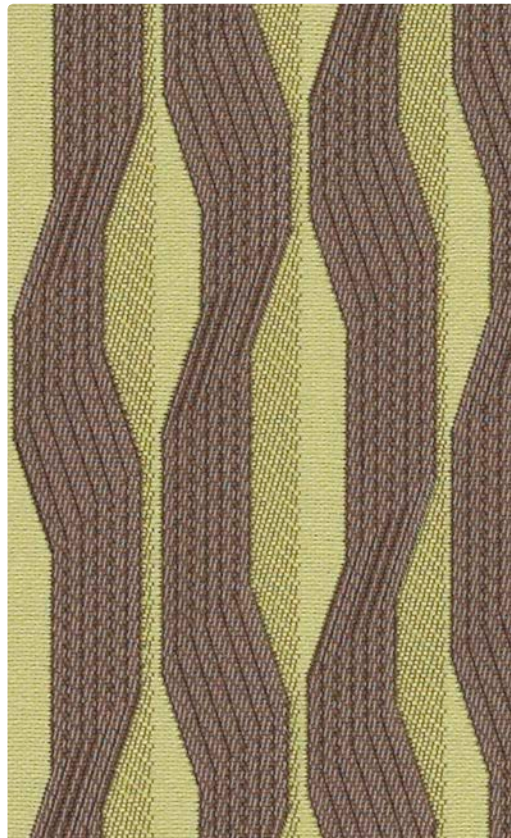


888-003 **Celadon**

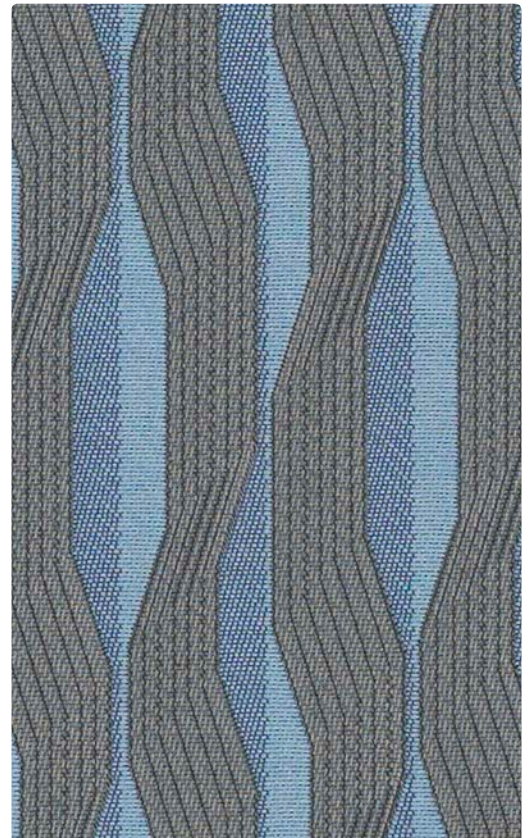


888-004 **Cerulean**




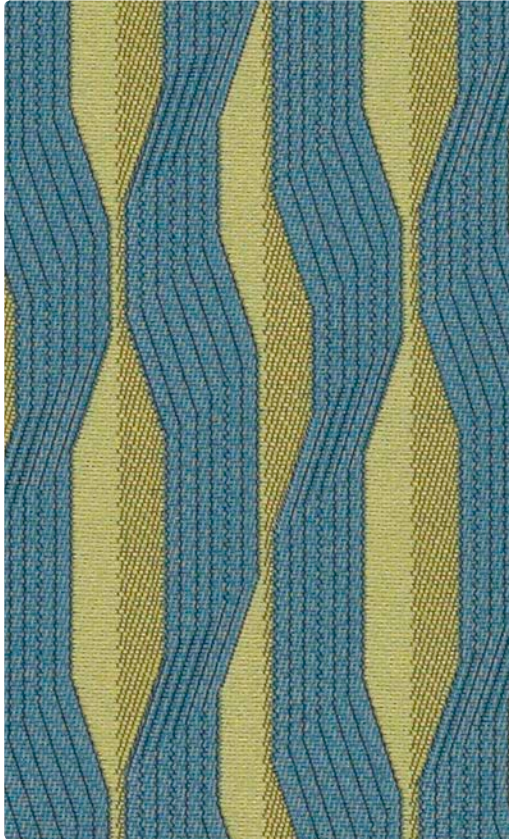


888-013 Limelight

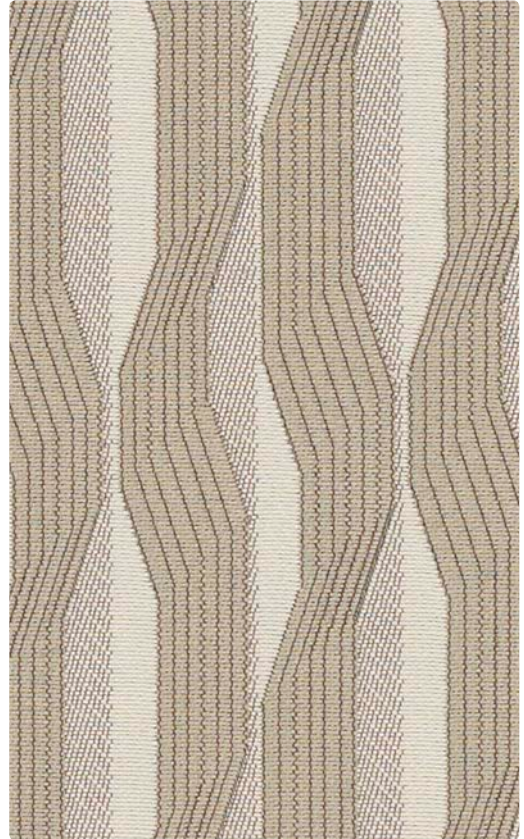

888-007 Stone

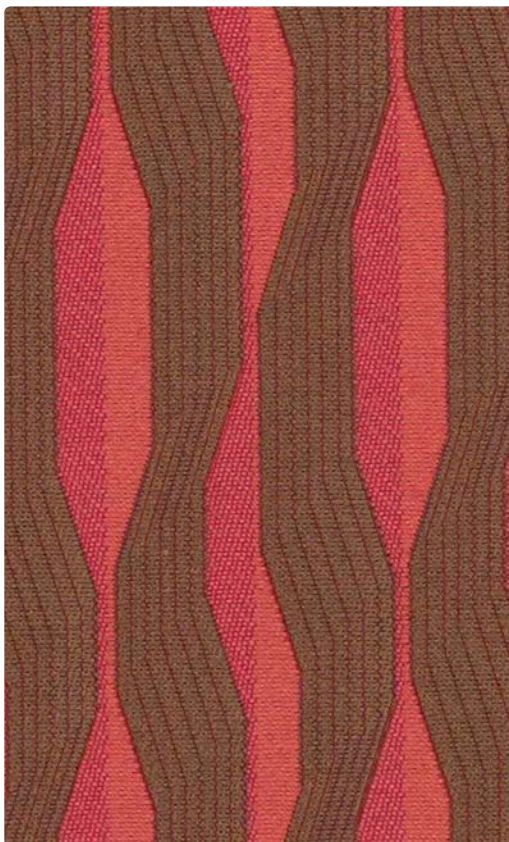

888-001 Rouge

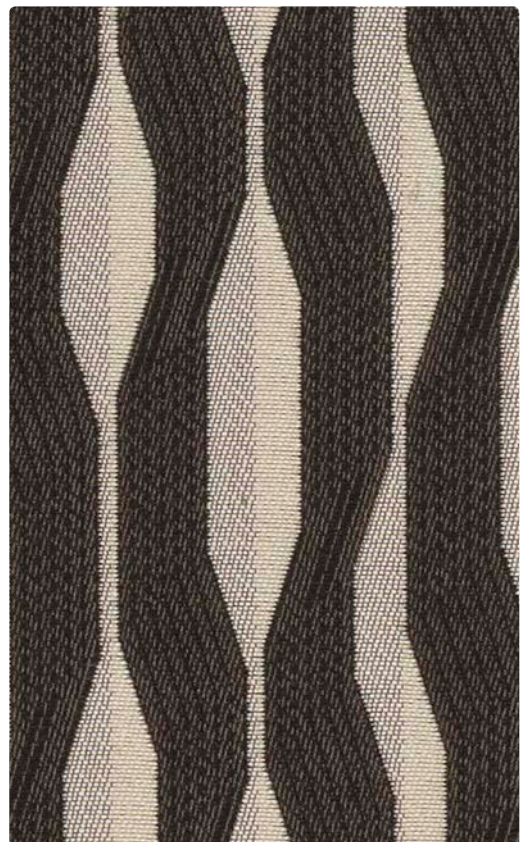

888-006 Ebony

Designed by students at the Savannah College of Art & Design - Allison Adderton, Katherine Dagen

TECHNICAL INFORMATION

Content: 72% Cotton, 28% Nylon
Width: 54"
Weight: 18.56 oz./linear yard

Backing: **INCASE™ Back Coat**
Finish: **INCASE™ with Antimicrobial Silver Ion Technology**
Cleaning Code: S

Approx. Repeat: 13.5" H, 5.5" V Random Match
Directional: Yes
Railroaded: No

PERFORMANCE (*Certification Marks owned by ACT.)

Test Method	Results
Surface Abrasion: Heavy Duty 	ASTM-D-3597 (Cotton Duck)
Breaking Strength: 	Passes 90,000 Double Rubs
Seam Slippage: 	Warp 308 lbs / Fill 242 lbs
Pilling Resistance: 	Warp 75 lbs / Fill 104 lbs
Colorfastness to Crocking: 	ASTM-D-4034
Colorfastness to Light: 	ASTM-D-3511
	Class 3.5
	AATCC-8
	Dry: Class 4 min / Wet: Class 4 min
	AATCC-16
	Class 4.5 at 60 hours

Class in the colorfastness requirements is based on a numerical scale of 5 for negligible or no color transfer to 1 for very severe color change or color transfer.

FLAMMABILITY

California Technical Bulletin 117, Section E
NFPA 260 (Equivalent to UFAC) Class 1
May comply with California Technical Bulletin 133 when combined with appropriate components.

Passes
Passes

REDUCED ENVIRONMENTAL IMPACT

GREENGUARD Gold Certified products are tested for low chemical emissions to standard UL 2818. For more information, visit UL.com/gg.

STAIN RESISTANCE

Stain Resistance is based on a numerical scale with 5 being the highest for stain removal.

	After 5 min./After 24 hrs.	STAIN RESISTANCE	After 5 min./After 24 hrs.
Blood	Class 4-5/Class 4-5	Urine	Class 4-5/Class 4-5
Iodine	Class 4-5/Class 4-5	Suntan Lotion	Class 4-5/Class 4-5
Ketchup	Class 4-5/Class 4-5	Black Coffee	Class 4-5/Class 4-5
Milk	Class 4-5/Class 4-5	Cola	Class 4-5/Class 4-5

BACTERIAL RESISTANCE

Non leaching Silver Ion Technology microbial protection.
Excellent anti-bacterial properties
INCASE™ resists bacterial growth, test ISO 20743:2007(E), Klebsiella pneumoniae (ATCC #4352)

CLEANING INFORMATION

S: Solvent – Spot clean, using a mild water-free solvent or dry cleaning product. Clean only in a well-ventilated room and avoid any product containing carbon tetrachloride or other toxic materials. Pretest a small area before proceeding.

Prompt cleaning is always recommended. For detailed care and cleaning information, please refer to the Mayer Fabrics website or contact customer service.

ADDITIONAL INFORMATION

Custom Capabilities: All patterns can be custom colored. Minimum yardage applies.

Memo Samples: Please keep this card intact. Individual memo samples can be ordered on our web site or by contacting customer service.

Fabric Color Matching: Mayer Fabrics always attempts to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.

Digital Swatch Card Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

Specifications: Specifications are correct at the time of printing. Current specifications are available on our web site.

For information or assistance with products or services, call us at 800.428.4415 or refer to our web site, www.mayerfabrics.com.



ASCENSION - Approx. Repeat: 13.5" H, 5.5" V Random Match



GSA Contract # GS-28F-0022P

MAYERFABRICS