

PVC FREE

with *SILVERGUARD*® Antibacterial Silver Ion Technology


COUNTERPOINT




CP-017 Porcelain



CP-013 Chartreuse



CP-009 Tangerine




CP-003 Emerald




CP-033 Chino




CP-027 Pyrite




CP-010 Umber

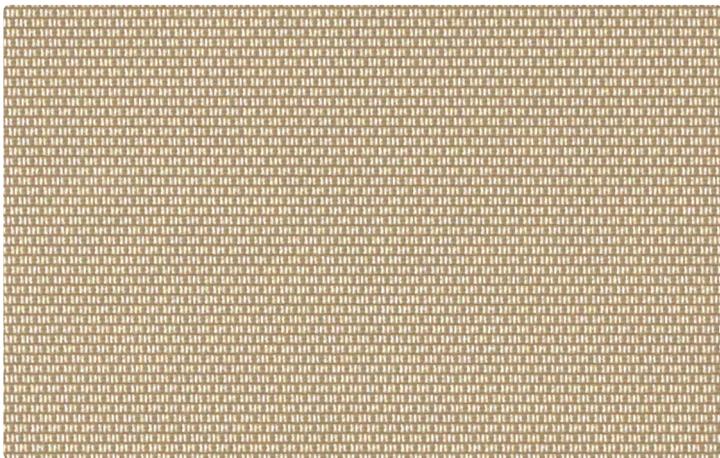

CP-007 Mica




CP-001 Scarlet




CP-014 Capri




CP-023 Everglade




CP-020 Spice




CP-000 Sable



CP-008 Sangria



CP-004 Royal



CP-024 Caribbean



CP-016 Nickel



CP-006 Graphite

Application
Upholstery Seating

Content
81% Polyurethane face - **PVC Free**, 19% Polyester backing

Width
54 inches

Abrasion (Wyzenbeek/Cotton Duck)
Passes 400,000 Double Rubs

Finish
Soil & Stain Resistant Top
Coat with Antibacterial
Silver Ion Technology

Reduced Environmental Impact
GREENGUARD Certified
No Heavy Metals
Formaldehyde Free

TECHNICAL INFORMATION

Content: 81% Polyurethane face - PVC Free , 19% Polyester backing	Weight: 21 oz./linear yard
Width: 54"	Finish: Soil & Stain Resistant Top Coat with Antibacterial Silver Ion Technology
Approx. Repeat: Non-matching	Directional: Yes
	Railroaded: No

PERFORMANCE

Surface Abrasion: Heavy Duty CFFA-1A/Method ASTM D 4157 (Wyzenbeek/Cotton Duck)	Results Passes 400,000 Double Rubs	Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.
Colorfastness to Crocking CFFA 7 / Fed. St. 191A M5651	Dry: Class 4 min / Wet: Class 3 min	
Colorfastness to Light CFFA-2 C2, ASM D-4329 QUV	Class 5/4 at 40/250 hours	
Hydrolytic Stability ASTM D-3690-02, Section 6.11	7-year Hydrolysis (adhesion, surface abrasion, resistance to flexing)	

FLAMMABILITY

California Technical Bulletin 117, Section E	Passes
NFPA 260 (Equivalent to UFAC) Class 1	Passes
FMVSS 302	Passes
IMO A.652(16) 8.2	Passes
IMO FTP 2010 Code MSC.307(88), Part 8, 3.1	Passes
May comply with California Technical Bulletin 133 when combined with appropriate components.	

REDUCED ENVIRONMENTAL IMPACT

This product is **GREENGUARD Certified** for low chemical and particle emissions to **UL standard UL 2818** and may contribute to **LEED certification**. For complete information visit mayerfabrics.com and UL.com/gg.
No Heavy Metals Formaldehyde Free

CLEANING INFORMATION

CFC: Coated Fabrics Cleaning – Refer to Mayer website for complete cleaning info.
BC: Bleach Cleanable – 1 part bleach, 9 parts water = 10% bleach, 90% water solution. **Do not clean/disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.**

ADDITIONAL INFORMATION

Custom Capabilities: All patterns can be custom colored. Minimum yardage applies.
Digital Swatch Card Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.
Specifications: Specifications are correct at the time of printing. Additional specifications are available on our website.

 This fabric meets or exceeds these ACT performance guidelines.
*Certification Marks owned by ACT®

