

DANDE





DN-002 Sunshine




DN-003 Patina

Application	Seating
Content	100% Vinyl
Width	54 inches
Abrasion	Passes 350,000 Double Rubs
Finish	Resilience ^{SR}
Reduced Environmental Impact GREENGUARD Certified	



DN-009 Ember

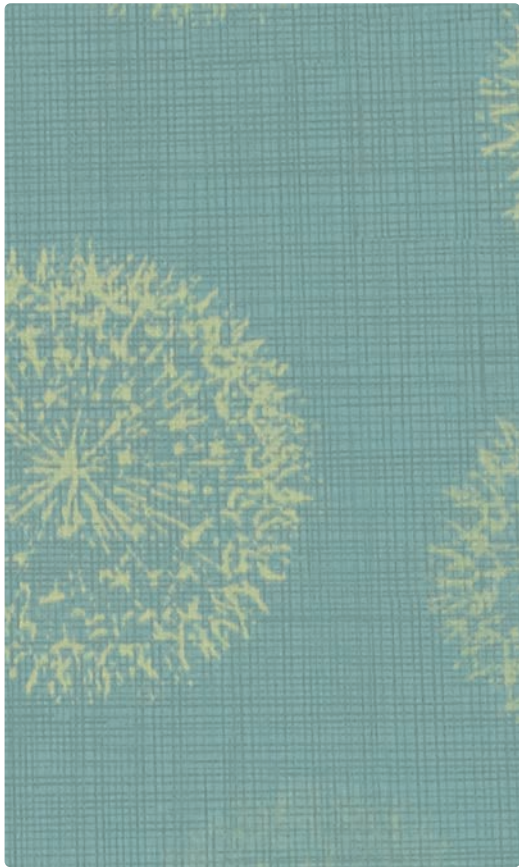

DN-014 Aqua



DN-007 Ecreu



DN-010 Latte



DN-000 Taupe



DN-006 Charcoal



DN-001 Berry



DN-004 Cerulean

TECHNICAL INFORMATION

Content: 100% Vinyl Width: 54" Weight: 30 oz./linear yd.	Backing: 100% Brushed Polyester Knit Finish: Resilience ^{SR} Cleaning Code: W, BC - Resilience ^{SR}	Approx. Repeat: 20.125" H, 20.125" V Random Match Directional: Yes Railroaded: No
--	---	---

PERFORMANCE (*Certification Marks owned by ACT*)	Test Method	Results
Surface Abrasion: Heavy Duty  *	CFFA-1A/Method ASTM D4157 (Cotton Duck)	Passes 350,000 Double Rubs
Breaking Strength:  *	CFFA-17 / ASTM-D-751	Warp 98.3 lbs/Fill 82.5 lbs
Colorfastness to Crocking:  *	AATCC-8	Dry: Class 4 min / Wet: Class 4 min
Colorfastness to Light:  *	UV Resistance - AATCC 16, Option 3	Passes 650 Hours - Suitable for marine use
Cold Crack:	CFFA-6 Fed. Stnd. No. 191A - Method 5874	-20° F

FLAMMABILITY

California Technical Bulletin 117-2013 NFPA 260/UFAC Class 1 ASTM E84 (Adhered & Unadhered) Class 1 or A May comply with California Technical Bulletin 133 when combined with appropriate components.	Passes Passes Passes	BIFMA FMVSS 302 IMO A.652 (16) 8.2 & 8.3	Passes Passes Passes
--	----------------------------	--	----------------------------

REDUCED ENVIRONMENTAL IMPACT

This product is GREENGUARD Certified for low chemical and particle emissions to UL standard UL 2818 and may contribute to LEED certification. For complete information visit mayerfabrics.com and UL.com/gg.

SPECIFIC TREATMENTS

Stain Resistant with Resilience^{SR} Abrasion Resistant Anti-Bacterial Anti-Microbial Sulfide Stain Resistant Mildew Resistant Bleach Cleanable

Resilience^{SR}
ENDURING PROTECTION

Resilience^{SR} represents the latest technology in Faux Leather and Vinyl Protection, enhancing performance where it is needed the most.

Stain Resistance: With proper care, materials treated with Resilience^{SR} can be easily cleaned and will guard against stains maintaining the desired surface appearance for years to come.

Anti-Microbial & Anti-Bacterial Protection: Products treated with Resilience^{SR} are engineered to inhibit bacterial growth, as well as fungus, mold and mildew spores, resulting in a more hygienic environment.

Abrasion Resistance: Resilience^{SR} provides additional wear properties and surface durability to any vinyl or faux leather, thereby increasing the life of the material.

Resilience^{SR} is not visible, and does not affect the hand of the material. Resilience^{SR} is engineered to last, even after repeated cleaning and wear. Specify Resilience^{SR} for the most demanding healthcare and hospitality applications.

Resilience^{SR} complies with ASTM G-21/CFFA 120 and AATCC 147/CFFA 300 inhibiting the growth of the following organisms:
Aspergillus Niger Penicillium Pinaphilum Chaetomium Globosum Trichoderma Virens Aureobasidium Pullulans Staphylococcus Aureus Klebsiella Pneumoniae Salmonella Choleraesuis Pseudomonas Aeruginosa

STAIN RESISTANCE

Stain Resistance per CFFA 141 (Determines the resistance of a fabric to staining when subjected to common house-hold stains and cleaning agents) - Class 5 (Excellent) rating:									
Butter	Blood	Coffee	Hair Spray	Iodine/Betadine	Ketchup	Lipstick	Liquid Foundation	Mascara	
Mayonnaise	Motor Oil	Salad Dressing	Soda	Soy Sauce	Suntan Lotion	Tea	Urine	Whiskey	

CLEANING INFORMATION

W: Water-Based Cleaner – Spot clean, using the foam only from a water-based cleaning agent, such as a mild detergent or non-solvent upholstery shampoo product. Apply foam with a soft brush in a circular motion. Always rinse promptly with clean water. Vacuum when dry. Pretest small area before proceeding.

BC: Bleach Cleanable – 1 part bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean/disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Prompt cleaning is always recommended. Recommended cleaning steps are listed by type of stain. For best results follow steps in order.

Recommended Care and Cleaning Steps

- Step 1: Mild soap and water, then rinse with fresh water and wipe dry with a clean cloth.
- Step 2: Wipe affected area with a soft cloth or soft bristle brush using a non-abrasive cleaner, i.e. Formula 409 or Fantastik. Rinse with fresh water and wipe dry.
- Step 3: 10% solution of household bleach and water. Rinse with fresh water and wipe dry.
- Step 4: 25% solution of alcohol and water. Rinse with fresh water and wipe dry.
- Step 5: 25% solution of lighter fluid or nail polish remover and water. Rinse with fresh water and wipe dry.

NOTE: The use of commercial vinyl conditioners and protectants is NOT RECOMMENDED.
The information in this cleaning guide refers to performance of Resilience in tests conducted under laboratory conditions. This information does not imply a specific guarantee and does not relieve the user from the responsibility of the proper and safe use of the product and referenced cleaning agents.

ADDITIONAL INFORMATION

Custom Capabilities: All patterns can be custom colored. Minimum yardage applies.

Memo Samples: Please keep this card intact. Individual memo samples can be ordered on our website or by contacting customer service.

Fabric Color Matching: Mayer Fabrics always attempts to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.

Digital Swatch Card Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

Specifications: Specifications are correct at the time of printing. Current specifications are available on our website.

For information or assistance with products or services, call us at 800.428.4415 or refer to our website, www.mayerfabrics.com.

GSA Contract #GS-28F-0022P

